

P3-DS326-HR

NTC Simulation Probe -50°C to +70°C

Supplied with 1.5m 2 core FEP cable

For use with the D3 family of wireless base stations
Compatible with a full range of Intelligent Wireless Transmitters (supplied separately)




A general purpose simulation temperature probe designed to simulate the core temperature of products within a storage environment. The NTC thermistor offers excellent stability and low drift over the lifetime of the sensor. The thermistor is housed within a 100x100x10mm diameter nylon block.

Splash proof design for easy wipe down for hygiene purposes.

The FEP cable can withstand the full temperature range and can be flexed at low temperatures.

Common uses: Fridges | Cold Rooms | Freezers

Product Drawing:

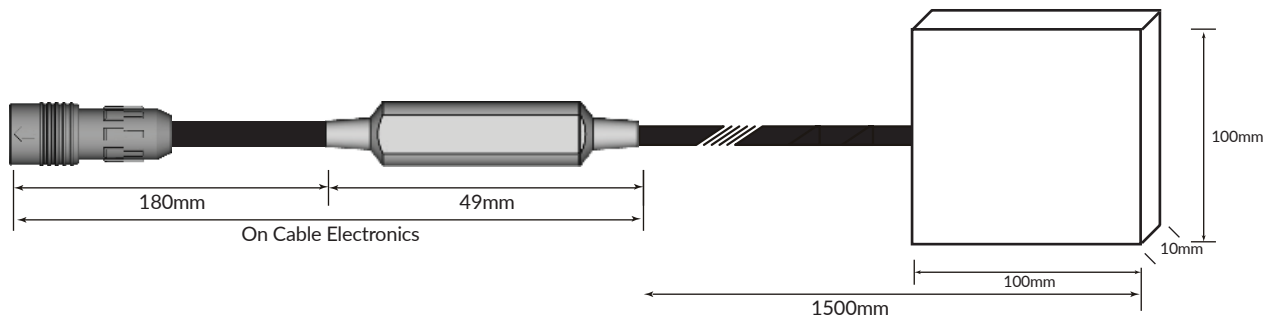

Technical Specifications:

Temperature Range: _____ -50°C to 70°C	On Cable Electronics
Accuracy: _____ Below -30° -30°C to 70°C Standard - ±0.8°C ±0.5°C	Connector IP Rating: _____ IP67
Thermistor: _____ NTC 5K R/T curve 8016/A01	Connector: _____ 3 pin male Hirose
Weight: _____ 140g	Operating Temperature: _____ -20°C to 55°C
Sensor Cable: _____ 1500mm 2 core FEP cable	Electronics Sheathing: _____ Technomelt OM678
Probe Sheathing: _____ White Nylon	Electronics & Probe IP Rating: _____ IP68
Time Response: _____ 20 minutes (96% of value in water)	



Doc: 106-10124-01 (Datasheet - P3-DS326-HR)

Visit: www.tek-troniks.com Call: 0115 9890090

Product Disclaimer:

The recommendations and suggestions regarding product application and use that are offered on Tek-troniks.com, in our product brochures, datasheets, or information provided by any employee or distributor, are a guide in the use of this product and are not a guarantee to their performance. Tektroniks reserve the right to alter specification of their products without prior warning or notification. Always read instruction manuals fully before installing any Tektroniks component.