

# P3-DS312-RJ

## 4-20mA Current Sensor




For use with the D3 family of wireless base stations

Compatible with a full range of P2-WS2XX Intelligent Wireless Transmitters (supplied separately)

Connects to any industry standard device that generates an active output current of 4-20mA. The signal can then be converted via a user custom table to a measured value for monitoring and alarm purposes.

Common uses: Pressure | Temperature | Concentration | Light | CO<sup>2</sup>

Product Drawing:

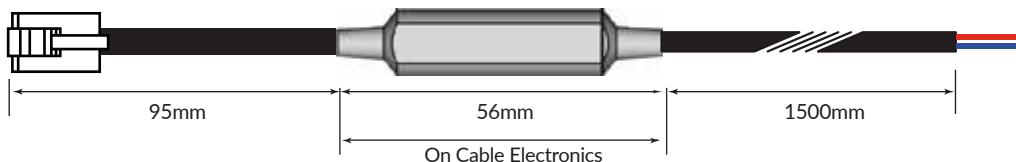

Technical Specifications:

	On Cable Electronics
Input Range:	1 - 24mA
Accuracy:	±1% over full scale
Resolution:	0.001mA
Weight:	38g
Sensor Cable:	1500mm 2 Core Arctic Cable
Connector:	RJ11
Operating Temperature:	-20°C to 55°C
Electronics Sheathing:	Technomelt OM678
Electronics IP Rating:	IP65



Doc: 106-10182-01 (Datasheet - P3-DS312-RJ)

Visit: [www.tek-troniks.com](http://www.tek-troniks.com) Call: 0115 9890090

#### Product Disclaimer:

The recommendations and suggestions regarding product application and use that are offered on Tek-troniks.com, in our product brochures, datasheets, or information provided by any employee or distributor, are a guide in the use of this product and are not a guarantee to their performance. Tektroniks reserve the right to alter specification of their products without prior warning or notification. Always read instruction manuals fully before installing any Tektroniks component.