

# P3-DS319-RJ

## Digital Input/Counting Sensor



For use with the D3 family of wireless base stations

Compatible with a full range of P2-WS2XX Intelligent Wireless Transmitters (supplied separately)

Connects to any industry standard device with a volt free digital output for measuring status of plant and machinery. In addition to status the sensor also counts the number of contacts.


Common uses:

Door monitoring providing both the status and number of occurrences.

Plant status monitoring.

Flood detection systems.

Product Drawing:

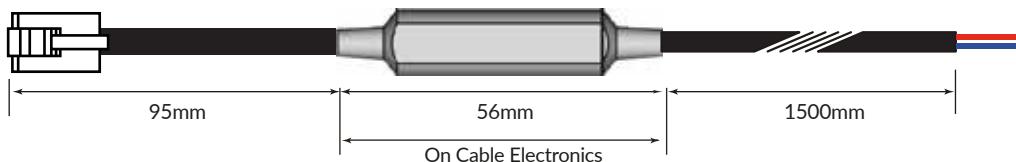

Technical Specifications:

Input Range: \_\_\_\_\_ Single volt free input

Min Pulse Width Period: \_\_\_\_\_ 2 Seconds

Weight: \_\_\_\_\_ 38g

Sensor Cable: \_\_\_\_\_ 1500mm 2 Core Arctic Cable

**On Cable Electronics**

Connector: \_\_\_\_\_ RJ11

Operating Temperature: \_\_\_\_\_ -20°C to 55°C

Electronics Sheathing: \_\_\_\_\_ Technomelt OM678

Electronics IP Rating: \_\_\_\_\_ IP65



Doc: 106-10187-01 (Datasheet - P3-DS319-RJ)

Visit: [www.tek-troniks.com](http://www.tek-troniks.com) Call: 0115 9890090

Product Disclaimer:

The recommendations and suggestions regarding product application and use that are offered on Tek-troniks.com, in our product brochures, datasheets, or information provided by any employee or distributor, are a guide in the use of this product and are not a guarantee to their performance. Tektroniks reserve the right to alter specification of their products without prior warning or notification. Always read instruction manuals fully before installing any Tektroniks component.