

# P3-DS318-RJ

## Pulse Counting Sensor



For use with the D3 family of wireless base stations

Compatible with a full range of P2-WS2XX Intelligent Wireless Transmitters (supplied separately)

Connects to any industry standard pulsed output meter with a standard pulse length of 100ms.


The signal can then be converted via a user custom table to a measured value for monitoring and alarm purposes.

Commonly uses:

Measurement energy consumption.

Measurement of liquids and gases flow.

Product Drawing:

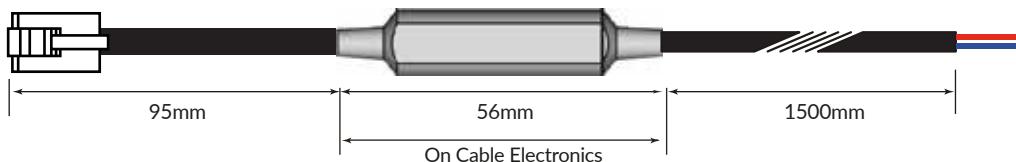

Technical Specifications:

	On Cable Electronics
Input Range:	External volt free signal contact
Pulse Length:	Min >50ms
Pulse Interval:	Min >50ms
Weight:	38g
Sensor Cable:	1500mm 2 Core Arctic Cable
Connector:	RJ11
Operating Temperature:	-20°C to 55°C
Electronics Sheathing:	Technomelt OM678
Electronics IP Rating:	IP65



Doc: 106-10186-01 (Datasheet - P3-DS318-RJ)

Visit: [www.tek-troniks.com](http://www.tek-troniks.com) Call: 0115 9890090

### Product Disclaimer:

The recommendations and suggestions regarding product application and use that are offered on Tek-troniks.com, in our product brochures, datasheets, or information provided by any employee or distributor, are a guide in the use of this product and are not a guarantee to their performance. Tektroniks reserve the right to alter specification of their products without prior warning or notification. Always read instruction manuals fully before installing any Tektroniks component.