

P3-DS328-RJ

PT1000 Needle Stab Probe 150x3.3mm

Supplied with 2m 2 core coiled cable

For use with the D3 family of wireless base stations

Compatible with a full range of P2-WS2XXX Intelligent Wireless Transmitters (supplied separately)




A robust multi-purpose stab temperature probe designed to penetrate to the core temperature of foods/products within a frozen storage environment. The PT1000 offers excellent stability and low drift over the lifetime of the sensor.

The stab probe is of waterproof design for easy wipe down/cleaning for hygiene purposes.

The FEP cable can withstand the full temperature range and can be flexed at low temperatures.

Common uses within: Freezers | Fridges | Cold Rooms | Production Areas

Product Drawing:

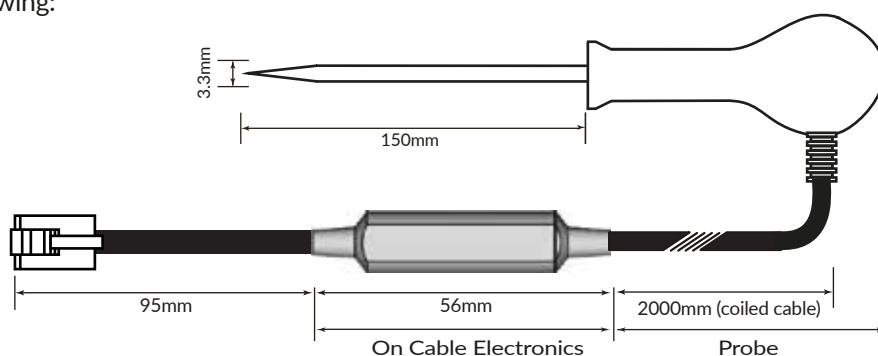

Technical Specifications:

Temperature Range: _____ -45°C to 100°C

Accuracy: _____ Below -20°C | -20°C to 70°C | 70°C to 100°C

Standard - ±0.5°C | ±0.5°C | ±0.5°C

Calibrated - ±0.3°C | ±0.2°C | ±0.3°C

Thermistor: _____ PT1000 Class A

Weight: _____ 125g

Sensor Cable: _____ 2000mm 2 core coiled cable

Probe Sheathing: _____ 316L grade stainless steel

On Cable Electronics

Connector: _____ RJ11

Operating Temperature: _____ -20°C to 55°C

Electronics Sheathing: _____ Technomelt OM678

Electronics IP Rating: _____ IP65

Probe IP Rating: _____ IP68



Doc: 106-10193-01 (Datasheet - P3-DS328-RJ)

Visit: www.tek-troniks.com Call: 0115 9890090

Product Disclaimer:

The recommendations and suggestions regarding product application and use that are offered on Tek-troniks.com, in our product brochures, datasheets, or information provided by any employee or distributor, are a guide in the use of this product and are not a guarantee to their performance. Tektroniks reserve the right to alter specification of their products without prior warning or notification. Always read instruction manuals fully before installing any Tektroniks component.